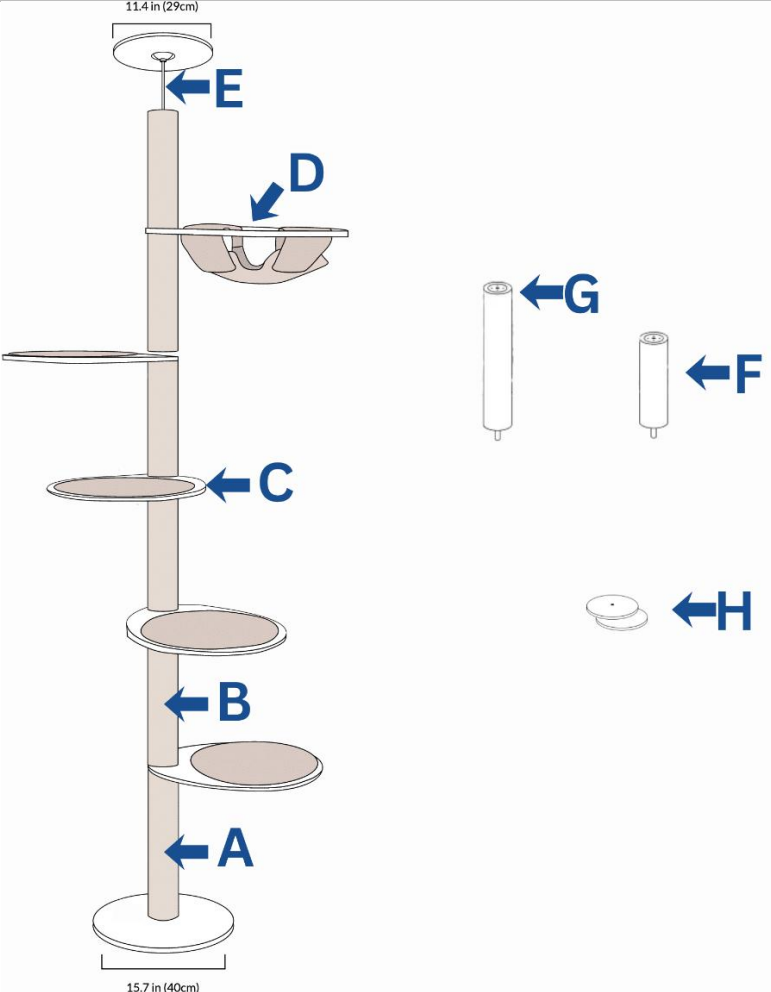


katpole

	A (Base Pole) Length: 46 cm (18.1 in) Diameter: 7.5 cm (3 in) Material: Aluminum Alloy (Body) and Chrome Plated Steel (Connectors) B (Sectional Pole) Length: 36 cm (14.2 in) Diameter: 7.5 cm (3 in) Material: Aluminum Alloy (Body) and Chrome Plated Steel (Connectors) C (Platform) Length: 56 cm (22 in) Width: 45 cm (18 in) Thickness: 1.2 cm (1/2 in) Useable Length: 48 cm (19 in) Detachable Carpet Diameter: 40 cm (15 ¾ in) Material: Canadian Plywood and Waterproof Vinyl Surface D (Hammock Frame) Length: 60 cm (23.6 in) Width: 55 cm (21.7 in) Thickness: 1.8cm (0.7 in) Opening Diameter: 40 cm (15 ¾ in) Material: Canadian Plywood and Waterproof Vinyl Surface
E (Adjustable Ceiling Bolt) Maximum Extension: 26cm (10 ¼ in) Minimal Extension: 2.4cm (1 in) Bottom Lock Nut: 17mm Material: Stainless Steel (17mm Nut), Chrome Plated Steel G (Long Extension Pole) Length: 46 cm (18.1 in) Diameter: 7.5 cm (3 in) Material: Aluminum Alloy (Body) and Chrome Plated Steel (Connectors) Notes 1. All configurations come with F (Short Extension Pole) 2. Katpole configuration that goes up to 10 ft 4 inches includes G (Long Extension Pole) 3. Maximum of 2 modules at each level: 2 platforms, 2 hammocks, or 1 platform and 1 hammock. 4. Katpole should be installed at a 90-degree angle to the ceiling and floor. 5. Achieving the maximum height of 10 ft 4 inches require 1 base pole, 5 sectional poles, 1 long extension pole, a fully extended ceiling bolt, and 2 modules at each level.¹	F (Short Extension Pole) Length: 26 cm (18.1 in) Diameter: 7.5 cm (3 in) Material: Aluminum Alloy (Body) and Chrome Plated Steel (Connectors) H (Skip Rings)² Diameter: 8 cm (3.15 in) Thickness: 1.2 cm (1/2 in) Material: Canadian Plywood and Waterproof Vinyl Surface

¹ Do not extend the pole beyond 10 feet 4 inches. Katpole assumes no liability for damages or injuries caused by unauthorized modifications or exceeding this height limit.

² Two (2) skips rings are included with all Katpole configurations.